


# ZyWALL ATP100/100W/200/500/700/800

## ATP Firewall

### Next-Gen Firewall for SMBs

The Zyxel ZyWALL Series is an Advanced Threat Protection Firewall dedicated for small and medium businesses, empowered by cloud intelligence leveling up network protection, especially in tackling unknown threats. The ZyWALL ATP Firewall Series not only supports all Zyxel security service such as Web Filtering, Application Patrol, Anti-Malware, Reputation Filter, etc., but also Sandboxing and SecuReporter. Infographic dashboard is also included, delivering high performance and ensuring comprehensive protection as a self-evolving solution.

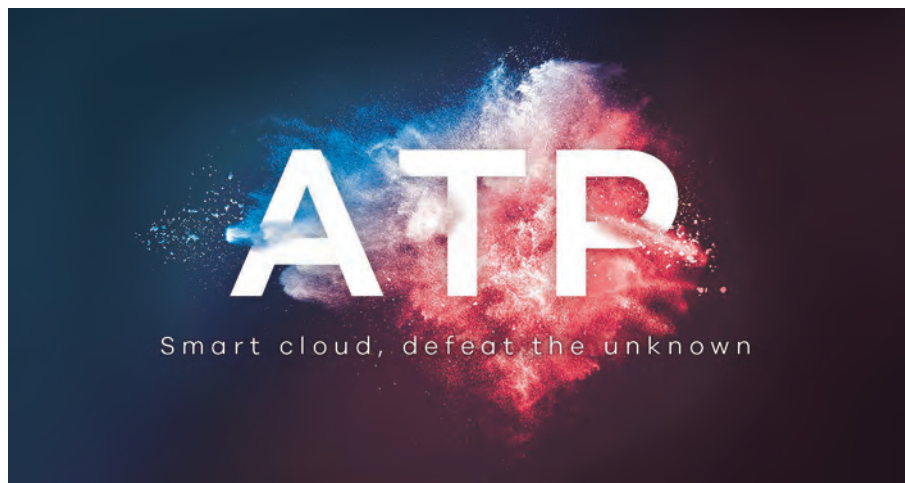

Machine learning threat intelligence with global sync



Sandboxing defeats unknown threats



DNS and URL Content Filter ensures the web security



High assurance multi-layered protection



CDR contains threats at the network edge



Secure WiFi guarantees remote work security



Reporting and analytics on cloud and device


# Benefits

## Self-evolving cloud intelligence

Cloud intelligence receives all unknown files or user patterns from Zyxel ATP firewall's enquiry then identifies and archives inspection results by Threat Intelligence Machine Learning. It then pushes the most top-ranked threat signature into all ATP firewalls so that all ATP devices are all within the seamless defense shield against new unknown threats. With the real-time cloud-device synchronization, the cloud intelligence becomes a continuously-growing and self-evolving security defense ecosystem, adaptive to external attacks and also more importantly keeping all ATP firewalls in sync at all times.

## Sandboxing emulates unknown to known


Sandboxing is an isolated cloud environment to contain unknown files that cannot be identified by existing security service on device and to emulate those unknown files to identify whether they are malicious or not. Key values from sandboxing is to inspect packet behavior in isolation so the potential threat does not enter the network at all, and also to identify new malware types which the conventional static security mechanism may not detect. Cloud sandboxing with Zyxel ATP Firewall Series is preventive measure for zero-day attacks of all sorts.

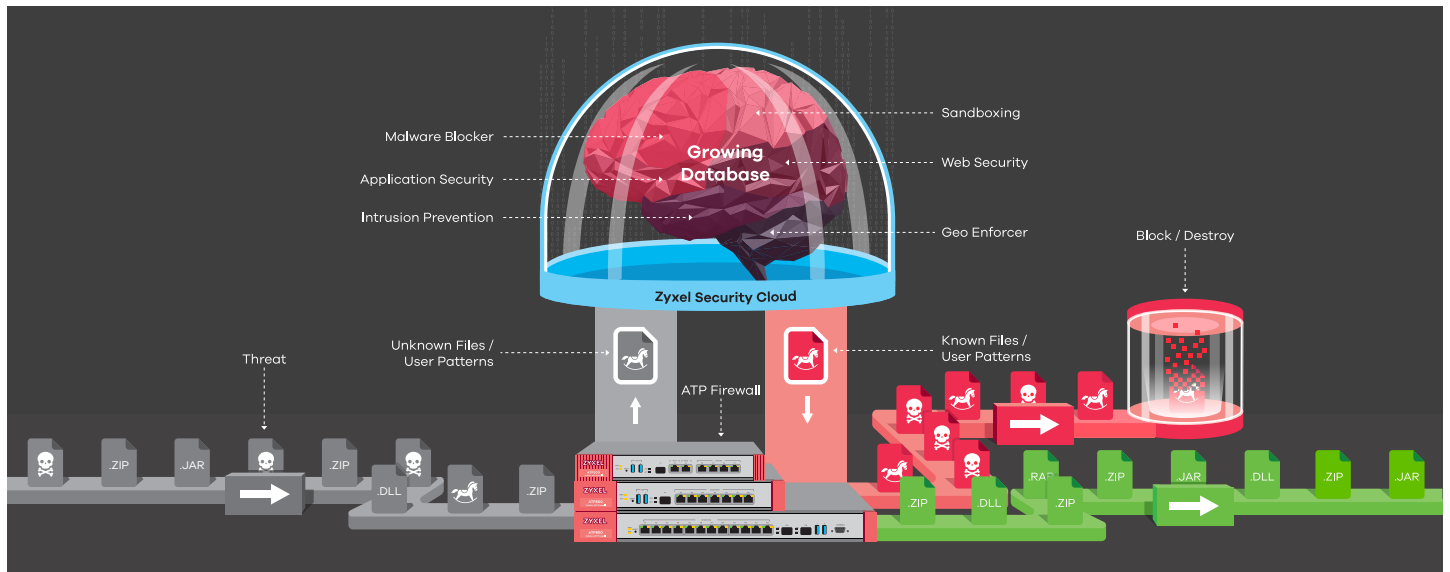

## High assurance multi-layered protection

Traditionally a one-to-one solution is designed to stop a specific attack. Malware has evolved and is capable of approaching your networks in every stages of attack. This traditional protection inevitably fails. The ZyWALL ATP Firewall Series is designed with multi-layered protection to guard against threats with multiple vectors from in and out.

It contains comprehensive security features like botnet filter, sandboxing, app patrol, content filtering, reputation filter, anti-malware, and IDP. As soon as your devices begin to get up and running, ATP firewalls are a sure way to start safeguarding your network without any unattended openings for attack.

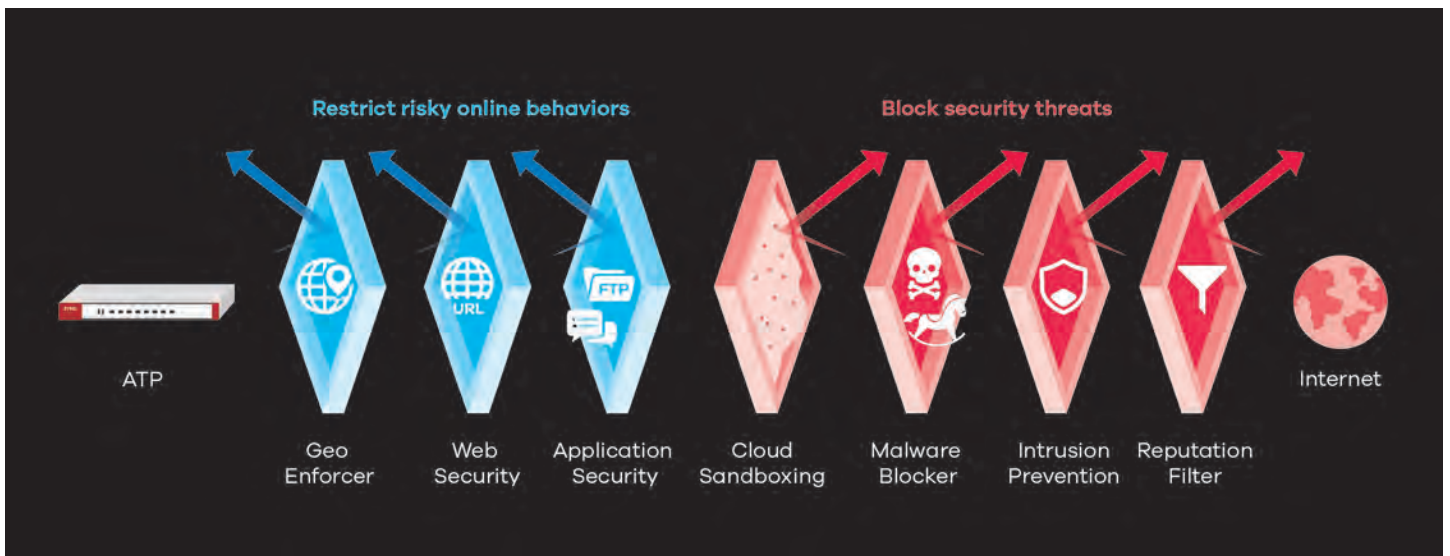

## Comprehensive Web Filtering service

ATP Firewall delivers enhanced web filtering functionality and security through its powerful combination of both reputation and category-based filtering. The dynamic content categorization analyzes the content of a previously unknown website and domain and determines if it belongs to an undesirable category including gambling, pornography, games, and many others. A newly added DNS Content Filter offers a better approach to inspect web access, particularly when the website is deploying ESNI (Encrypted Server Name Indication) where the traditional URL filtering failed to identify the destination domain.




## Reputation Filter preemptive IP/DNS/URL defense

Reputation Filter, consisting of IP Reputation, DNS Threat Filter, and URL Threat Filter, matches up IP/domain/ URL addresses with the always-up-to-date cloud reputation database and determines if an address is reputable or not. This improves blocking efficiency, restricts access to malicious IP/domain/URL, and blocks access from compromised sources, thus providing granular protection against ever-evolving cyber threats.




## Hybrid scanning leveling up malware blocking

ATP series not only supports a stream-based engine that scans files at the gateway for viruses and other threats but also runs cloud query simultaneously to leverage the multiple-sourced databases from Zyxel security cloud, a machine learning threat intelligence that can adapt to new unknown threats. This hybrid mode protection effectively maximizes malware detection rate without sacrificing throughput.

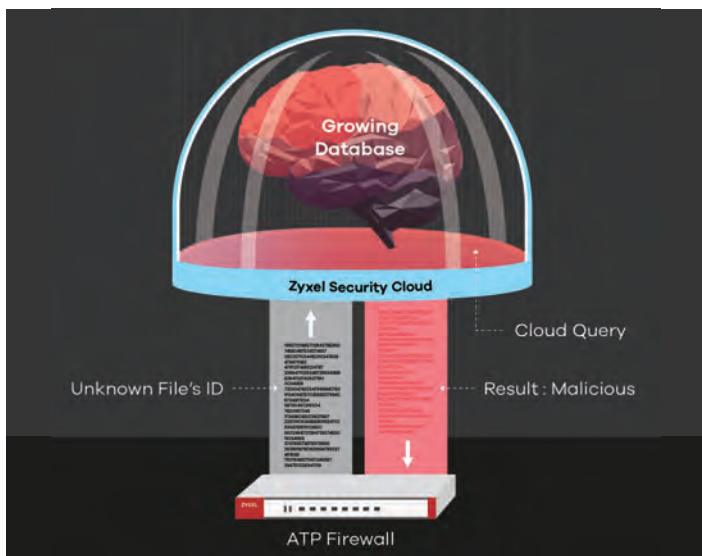

## Secure WiFi guarantees remote work security


Businesses striking a balance on productivity and security protection becomes a priority with growing number of devices. Whether it is a wired, wireless, or a IoT device, the Secure WiFi service is used to build a secure L2 tunnel for Work-From-Home user to extend the working experience easily and securely, as if you were in the office with the safety of both two-factor authentication and secure tunnel, which boosts up productivity and eases IT support. The Secure WiFi service also unlocks the number of managed APs to maximum for the ATP firewall.

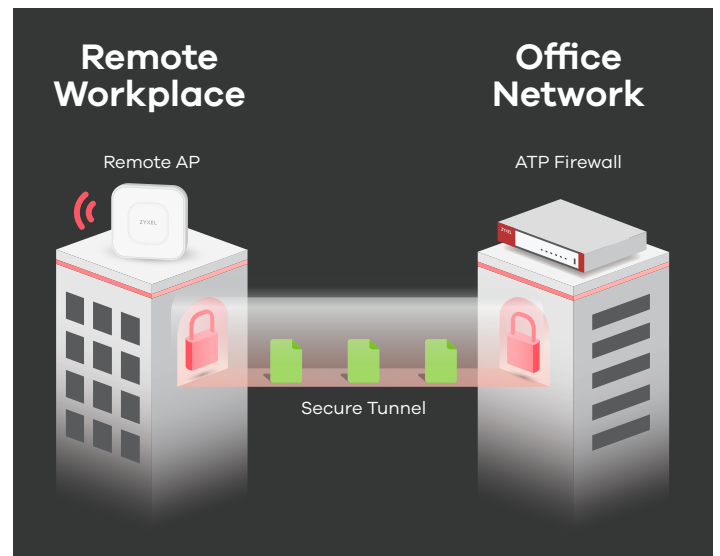

## Stay Ahead of the Threats with CDR

Collaborative Detection & Response (CDR) identifies threat in your business processes, data and users, and related risks. Depending on the attack frequency and threat level, it generates a protection rule. ATP Firewall takes a

great leap forward to adopt this generated protection rule to automatically stop threats at the network edge. It's perfect fit for SMB(s) to address the requirements of a decentralized, IoT-driven network infrastructure.

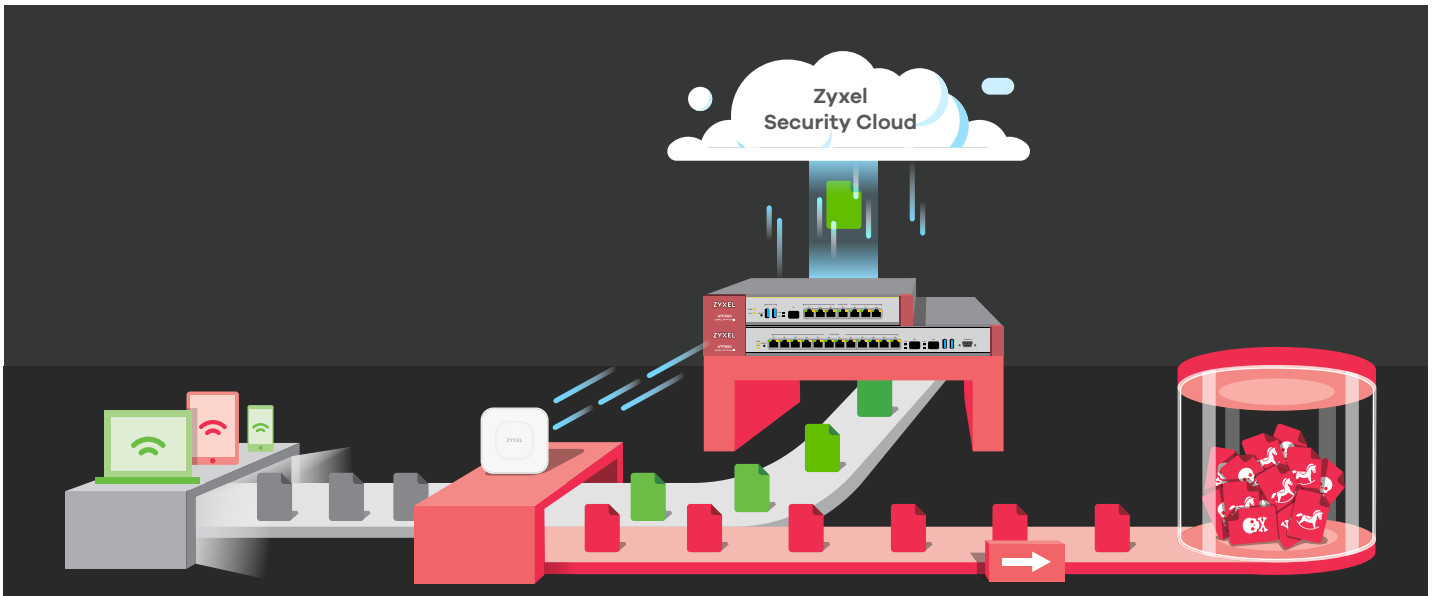

## Visualize unknown threat analytics and reports

ATP Firewall dashboard gives user-friendly traffic summary and threat statistic visuals. Utilize SecuReporter for a suite of analysis and reporting tools, including network security threats identification/analysis, security services, events, usage of the applications, websites, and traffic. Analyze sandboxing scanning activity details, show the top ranked

botnet threat websites, and their types, while listing out which internal hosts are controlled. Provide analytics from reputation services - IP reputation, DNS Threat Filter, and URL Threat Filter - to give full visibility on IP/URL/domain threat events.



## Services and Licenses

The ZyWALL ATP Firewall Series provides a complete feature set to perfectly fit different business requirements as well as to enable the maximum performance and security with an all-in-one appliance. Comprehensive network modularity also empowers IT professionals to customize the system to meet their individual needs.



CDR



Secure WiFi



Web Filtering



App Patrol



Email Security



Anti-Malware



IPS



Reputation Filter



Geo Enforcer



Sandboxing



SecuReporter




## License Packs

Licensed Service	Feature	ZyWALL ATP100/100W/200/500/700/800* Gold (1 Year/2 Years/4 Years)
Web Filtering	Content Filter	Yes
App Patrol	Application visibility and control	Yes
Email Security	Anti-Spam	Yes
Anti-Malware	Anti-Malware with Hybrid Mode	Yes
	Threat Intelligence Matching Learning	Yes
IPS	Intrusion Detection & Prevention	Yes
Reputation Filter	IP Reputation	Yes
	DNS Threat Filter	Yes
	URL Threat Filter	Yes
Geo Enforcer	GeoIP	Yes
Sandboxing	Sandboxing	Yes
SecuReporter	SecuReporter Premium	Yes
Secure WiFi	Secure Tunnel for Remote AP	Yes
	Managed AP Service*2	Unlock to Max
CDR	Collaborative Detection & Response	Yes




\*: All ATP models are bundled with one-year Gold Security Pack by default, and this pack cannot be transferred.

\*1: Gold Pack gives a year of unlocked managed AP nodes (24 APs for ATP100/100W, 40 APs for ATP200, 72 APs for ATP500, 264 APs for ATP700, 520 APs for ATP800), only 8 APs will be supported if it's no longer renewed.

## Specifications

Model	ZyWALL ATP100	ZyWALL ATP100W	ZyWALL ATP200	
Product photo				
<b>Hardware Specifications</b>				
Interface	3 x LAN/DMZ, 1 x WAN, 1 x SFP, 1x OPT	3 x LAN/DMZ, 1 x WAN, 1 x SFP, 1x OPT	4 x LAN/DMZ, 2 x WAN, 1 x SFP	
USB 3.0 ports	1	1	2	
Console port	RJ-45	RJ-45	DB9	
Rack-mountable	-	-	Yes	
Fanless	Yes	Yes	Yes	
<b>System Capacity &amp; Performance*1</b>				
SPI firewall throughput (Mbps)*2	1,000	1,000	2,000	
VPN throughput (Mbps)*3	300	300	500	
IPS throughput (Mbps)*4	600	600	1,200	
Anti-malware throughput (Mbps)*4	380	380	630	
UTM throughput (AV and IDP, Mbps)*4	380	380	600	
Max. TCP concurrent sessions*5	300,000	300,000	600,000	
Max. concurrent IPsec VPN tunnels*6	40	40	100	
Recommended gateway-to-gateway IPsec VPN tunnels	20	20	50	
Concurrent SSL VPN users	30	30	60	
VLAN interface	8	8	16	
<b>Speedtest Performance</b>				
SPI firewall throughput (Mbps)*7	850	850	900	
<b>Key Features</b>				
Security Service	Sandboxing*8	Yes	Yes	Yes
	Web Filtering*8	Yes	Yes	Yes
	Application Patrol*8	Yes	Yes	Yes
	Anti-Malware*8	Yes	Yes	Yes
	IPS*8	Yes	Yes	Yes
	Reputation Filter*8	Yes	Yes	Yes
	Geo Enforcer*8	Yes	Yes	Yes
	SecuReporter Premium*8	Yes	Yes	Yes
	Collaborative Detection & Response*8	Yes	Yes	Yes
	SSL (HTTPS) Inspection	Yes	Yes	Yes
2-Factor Authentication	Yes	Yes	Yes	
VPN Features	VPN	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec
	Microsoft Azure	Yes	Yes	Yes
	Amazon VPC	Yes	Yes	Yes

Model		ZyWALL ATP100	ZyWALL ATP100W	ZyWALL ATP200
<b>Key Features</b>				
<b>WLAN Management</b>	<b>Default number of managed AP</b>	8	8	8
	<b>Recommend max. AP in 1 AP Group</b>	10	10	20
	<b>Secure WiFi Service*8</b>	Yes	Yes	Yes
	<b>Maximum Number of Tunnel-Mode AP</b>	6	6	10
	<b>Maximum Number of Managed AP</b>	24	24	40
<b>Connectivity Management</b>	<b>Device HA Pro</b>	-	-	-
	<b>Link Aggregation (LAG)</b>	-	-	-
<b>Power Requirements</b>				
<b>Power input</b>		12V DC, 2A max.	12V DC, 2A max.	12V DC, 2.5A max.
<b>Max. power consumption (Watt Max.)</b>		12.5	12.5	13.3
<b>Heat dissipation (BTU/hr)</b>		42.65	42.65	45.38
<b>Physical Specifications</b>				
<b>Item</b>	<b>Dimensions (WxDxH) (mm/in.)</b>	216 x 147.3 x 33/ 8.50 x 5.80 x 1.30	216 x 147.3 x 33/ 8.50 x 5.80 x 1.30	272 x 187 x 36/ 10.7 x 7.36 x 1.42
	<b>Weight (kg/lb.)</b>	0.85/1.87	0.85/1.87	1.4/3.09
<b>Packing</b>	<b>Dimensions (WxDxH) (mm/in.)</b>	284 x 190 x 100/ 11.18 x 7.48 x 3.94	284 x 190 x 100/ 11.18 x 7.48 x 3.94	427 x 247 x 73/ 16.81 x 9.72 x 2.87
	<b>Weight (kg/lb.)</b>	1.4/3.09	1.4/3.09	2.42/5.34
<b>Included accessories</b>		<ul style="list-style-type: none"> <li>• Power adapter</li> <li>• RJ-45 cable</li> <li>• RS-232 cable</li> </ul>	<ul style="list-style-type: none"> <li>• Power adapter</li> <li>• RJ-45 cable</li> <li>• RS-232 cable</li> </ul>	<ul style="list-style-type: none"> <li>• Power adapter</li> <li>• Rack mounting kit</li> </ul>
<b>Environmental Specifications</b>				
<b>Operating environment</b>	<b>Temperature</b>	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F
	<b>Humidity</b>	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
<b>Storage environment</b>	<b>Temperature</b>	-30°C to 70°C/ -22°F to 158°F	- 30°C to 70°C/ - 22°F to 158°F	-30°C to 70°C/ -22°F to 158°F
	<b>Humidity</b>	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
<b>MTBF (hr)</b>		989,810.8	989,810.8	529,688.2
<b>Acoustic noise</b>		-	-	-
<b>Certifications</b>				
<b>EMC</b>		FCC Part 15 (Class B), CE EMC (Class B), BSMI	FCC Part 15 (Class B), CE EMC (Class B), BSMI	FCC Part 15 (Class B), CE (Class B), C-Tick (Class B), BSMI
<b>Safety</b>		LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI

Model	ZyWALL ATP500	ZyWALL ATP700	ZyWALL ATP800	
Product photo				
<b>Hardware Specifications</b>				
Interface	7(Configurable), 1x SFP	12 (configurable), 2x SFP (configurable)	12 (configurable), 2x SFP (configurable)	
USB 3.0 ports	2	2	2	
Console port	DB9	DB9	DB9	
Rack-mountable	Yes	Yes	Yes	
Fanless	-	-	-	
<b>System Capacity &amp; Performance*1</b>				
SPI firewall throughput (Mbps)*2	2,600	6,000	8,000	
VPN throughput (Mbps)*3	900	1,200	1,500	
IPS throughput (Mbps)*4	1,700	2,200	2,700	
Anti-malware throughput (Mbps)*4	900	1,600	2,000	
UTM throughput (AV and IDP, Mbps)*4	890	1,500	1,900	
Max. TCP concurrent sessions*5	1,000,000	1,600,000	2,000,000	
Max. concurrent IPsec VPN tunnels*6	300	1,000	1,000	
Recommended gateway-to-gateway IPsec VPN tunnels	150	300	300	
Concurrent SSL VPN users	150	150	500	
VLAN interface	64	128	128	
<b>Speedtest Performance</b>				
SPI firewall throughput (Mbps)*7	900	930	930	
<b>WLAN Management</b>				
Security Service	Sandboxing*8	Yes	Yes	Yes
	Web Filtering*8	Yes	Yes	Yes
	Application Patrol*8	Yes	Yes	Yes
	Anti-Malware*8	Yes	Yes	Yes
	IPS*8	Yes	Yes	Yes
	Reputation Filter*8	Yes	Yes	Yes
	Geo Enforcer*8	Yes	Yes	Yes
	SecuReporter Premium*8	Yes	Yes	Yes
	Collaborative Detection & Response*8	Yes	Yes	Yes
	SSL (HTTPS) Inspection	Yes	Yes	Yes
2-Factor Authentication	Yes	Yes	Yes	
VPN Features	VPN	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec
	Microsoft Azure			
	Amazon VPC	Yes	Yes	Yes



Model		ZyWALL ATP500	ZyWALL ATP700	ZyWALL ATP800
<b>Key Features</b>				
<b>WLAN Management</b>	<b>Default number of managed AP</b>	8	8	8
	<b>Recommend max. AP in 1 AP Group</b>	60	200	300
	<b>Secure WiFi Service*8</b>	Yes	Yes	Yes
	<b>Maximum Number of Tunnel-Mode AP</b>	18	66	130
	<b>Maximum Number of Managed AP</b>	72	264	520
<b>Connectivity Management</b>	<b>Device HA Pro</b>	Yes	Yes	Yes
	<b>Link Aggregation (LAG)</b>	Yes	Yes	Yes
<b>Power Requirements</b>				
<b>Power input</b>		12 V DC, 4.17 A	100-240V AC, 50/60Hz, 2.5A max.	100-240 V AC, 50/60 Hz, 2.5 A max.
<b>Max. power consumption (watt)</b>		24.1	46	46
<b>Heat dissipation (BTU/hr)</b>		82.23	120.1	120.1
<b>Physical Specifications</b>				
<b>Item</b>	<b>Dimensions (WxDxH) (mm/in.)</b>	300 x 188 x 44/ 11.81 x 7.4 x 1.73	430 x 250 x 44/ 16.93 x 9.84 x 1.73	430 x 250 x 44/ 16.93 x 9.84 x 1.73
	<b>Weight (kg/lb.)</b>	1.65/3.64	3.3/7.28	3.3/7.28
<b>Packing</b>	<b>Dimensions (WxDxH) (mm/in.)</b>	351 x 152 x 245/ 13.82 x 5.98 x 9.65	519 x 392 x 163/ 20.43 x 15.43 x 6.42	519 x 392 x 163/ 20.43 x 15.43 x 6.42
	<b>Weight (kg/lb.)</b>	2.83/6.24	4.8/10.58	4.8/10.58
<b>Included accessories</b>		<ul style="list-style-type: none"> <li>• Power adapter</li> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul>	<ul style="list-style-type: none"> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul>	<ul style="list-style-type: none"> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul>
<b>Environmental Specifications</b>				
<b>Operating environment</b>	<b>Temperature</b>	0°C to 40°C/ 32°F to 104°F	0°C to 40°C / 32°F to 104°F	0°C to 40°C/ 32°F to 104°F
	<b>Humidity</b>	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
<b>Storage environment</b>	<b>Temperature</b>	-30°C to 70°C/ -22°F to 158°F	- 30°C to 70°C / - 22°F to 158°F	-30°C to 70°C/ -22°F to 158°F
	<b>Humidity</b>	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
<b>MTBF (hr)</b>		529,688.2	947,736	947,736
<b>Acoustic noise</b>		24.5dBA on <25°C Operating Temperature, 41.5dBA on full FAN speed	25.3dBA on <25°C Operating Temperature 46.2dBA on full FAN speed	25.3dBA on <25°C Operating Temperature 46.2dBA on full FAN speed
<b>Certifications</b>				
<b>EMC</b>		FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI	FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI	FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI
<b>Safety</b>		LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI

\*: This matrix with firmware ZLD5.00 or later.

\*1: Actual performance may vary depending on system configuration, network conditions, and activated applications.

\*2: Maximum throughput based on RFC 2544 (1,518-byte UDP packets).

\*3: VPN throughput measured based on RFC 2544 (1,424-byte UDP packets).

\*4: Anti-malware (with Express mode) and IPS throughput measured using the industry standard HTTP performance test (1,460-byte HTTP packets). Testing done with multiple flows.

\*5: Maximum sessions measured using the industry standard IXIA iXLoad testing tool.

\*6: Including Gateway-to-Gateway and Client-to-Gateway.

\*7: The Speedtest result is conducted with 1Gbps WAN link in real world and it is subject to fluctuate due to quality of the ISP link.

\*8: Enable or extend feature capacity with Zyxel service license.

## Wireless Specifications

Model	ZyWALL ATP100W	
Standard compliance	802.11 a/b/g/n/ac	
Wireless frequency	2.4 / 5 GHz	
Radio	2	
SSID number	8	
Maximum transmit power (Max. total channel)	US (FCC) 2.4 GHz	25 dBm, 3 antennas
	US (FCC) 5 GHz	25 dBm, 3 antennas
	EU (ETSI) 2.4 GHz	20 dBm(EIRP), 3 antennas
	EU (ETSI) 5 GHz	20 dBm(EIRP), 3 antennas
No. of antenna	3 detachable antennas	
Antenna gain	2 dBi @2.4 GHz	
	3 dBi @ 5 GHz	
Data rate	802.11n: up to 450 Mbps 802.11ac: up to 1300 Mbps	
Frequency Band	2.4 GHZ (IEEE 802.11 b/g/n)	USA (FCC) : 2.412 to 2.462 GHz Europe (ETSI) : 2.412 to 2.472 GHz TWN (NCC) : 2.412 to 2.462 GHz
	5 GHZ (IEEE 802.11 a/n/ac)	USA (FCC) : 5.150 to 5.250 GHz; 5.250 to 5.350 GHz; 5.470 to 5.725 GHz; 5.725 to 5.850 GHz Europe (ETSI) : 5.15 to 5.35 GHz; 5.470 to 5.725 GHz TWN (NCC) :5.15 to 5.25 GHz; 5.25 to 5.35 GHz; 5.470 to 5.725 GHz; 5.725 to 5.850 GHz
Receive sensitivity	2.4 GHZ	11 Mbps ≤ -87 dBm 54 Mbps ≤ -77 dBm HT20 ≤ -71 dBm HT40 ≤ -68 dBm
	5 GHZ	54 Mbps ≤ -74 dBm HT40, MCS23 ≤ -68 dBm VHT40, MCS9 ≤ -62 dBm HT20, MCS23 ≤ -71 dBm VHT20, MCS8 ≤ -66 dBm VHT80, MCS9 ≤ -59 dBm

## Software Features

### Security Service

#### Firewall

- ICSA-certified corporate firewall
- Routing and transparent (bridge) modes
- Stateful packet inspection
- User-aware policy enforcement
- SIP/H.323 NAT traversal
- ALG support for customized ports
- Protocol anomaly detection and protection
- Traffic anomaly detection and protection
- Flooding detection and protection
- DoS/DDoS protection

#### Unified Security Policy

- Unified policy management interface
- Support Content Filtering, Application Patrol, firewall (ACL/SSL)

- Policy criteria: zone, source and destination IP address, user, time

#### Intrusion Detection and Prevention (IDP)

- Routing and transparent (bridge) mode
- Signature-based and behavior based scanning
- Customized signatures supported
- Automatic signature updates

#### Application Patrol

- Granular control over the most important applications
- Identifies and controls application behavior
- Supports 30+ application categories
- Supports user authentication
- Real-time statistics and reports

#### Sandboxing

- Cloud-based multi-engine inspection
- Support HTTP/SMTP/POP3/FTP
- Wild range file type examination
- Real-time threat synchronization

#### Anti-Malware

- Stream-based scan engine (Stream Mode)
- HTTP, FTP, SMTP, and POP3 protocol supported
- No file size limitation
- Automatic signature updates

#### Hybrid Mode Malware Scanning

- Both stream-based engine and cloud query concurrently in action
- Works with local cache and over 30 billion databases and growing
- HTTP, HTTPS, and FTP protocol supported
- Multiple file types supported

## E-mail Security

- Transparent mail interception via SMTP and POP3 protocols
- Spam, Phishing, mail detection
- Blacklist and whitelist support
- Supports DNSBL checking

## IP Reputation Filter

- IP-based reputation filter
- Supports 10 Cyber Threat Categories
- Supports external IP blacklist
- Inbound & Outbound traffic filtering
- Blacklist and whitelist support

## DNS Threat Filter

- Block clients to access malicious domain
- Effective against any IP protocol

## URL Threat Filter

- Botnet C&C websites blocking
- Malicious URL blocking
- Supports External URL blacklist

## Content Filtering

- HTTPs domain filtering
- SafeSearch support
- Whitelist websites enforcement
- URL blacklist and whitelist with keyword blocking
- Customizable warning messages and redirect URL
- Customizable Content Filtering block page
- URL categories increased to 111
- CTIRU (Counter-Terrorism Internet Referral Unit) support

## Geo Enforcer

- Geo IP blocking
- Geographical visibility on traffics statistics and logs
- IPv6 address support

## IP Exception

- Provides granular control for target source and destination IP
- Supports security service scan bypass for Anti-malware (including Sandboxing), IDP, IP Reputation, and URL Threat Filter

## Collaborative Detection & Response

- Support Alert/Block/Quarantine containment actions
- Prevent malicious wireless clients network access with blocking feature
- Customizable warning messages and redirect URL
- Bypass by IP or MAC address with exempt list

## VPN

### IPSec VPN

- Key management: IKEv1 (x-auth, mode-config), IKEv2 (EAP, configuration payload)
- Encryption: DES, 3DES, AES (256-bit)
- Authentication: MD5, SHA1, SHA2 (512-bit)
- Perfect forward secrecy (DH groups) support 1, 2, 5, 14, 15-18, 20-21
- PSK and PKI (X.509) certificate support
- IPSec NAT traversal (NAT-T)
- Dead Peer Detection (DPD) and relay detection
- VPN concentrator
- Route-based VPN Tunnel Interface (VTI)
- VPN high availability (Failover, LB)
- GRE over IPSec
- NAT over IPSec
- L2TP over IPSec
- Zyxel VPN client provisioning
- Support iOS L2TP/IKE/IKEv2 VPN client provision

### SSL VPN

- Supports Windows and macOS
- Supports full tunnel mode
- Supports 2-Factor authentication

## Networking

### Secure WiFi

- Secure Tunnel for Remote AP
  - L2 access between home office and HQ (Secured Tunnel)
  - Enforcing 2FA with Google Authenticator
- WPA2 Enterprise (802.1x) supported
- Wireless Storm Control
  - Applicable regardless of the on-premise/Nebula-managed mode of the USG FLEX

### WLAN Management

- Supports AP Controller (APC) version 3.60
- 802.11ax Wi-Fi 6 AP and WPA3 support
- 802.11k/v/r support
- Wireless L2 isolation
- Supports auto AP FW update
- Scheduled WiFi service
- Dynamic Channel Selection (DCS)
- Client steering for 5 GHz priority and sticky client prevention
- Auto healing
- Customizable captive portal page

- WiFi Multimedia (WMM) wireless QoS
- CAPWAP discovery protocol
- Multiple SSID with VLAN
- Supports ZyMesh
- Support AP forward compatibility
- Rogue AP Detection

### Mobile Broadband

- WAN connection failover via 3G and 4G\* USB modems
- Auto fallback when primary WAN recovers

### IPv6 Support

- Dual stack
- IPv4 tunneling (6rd and 6to4 transition tunnel)
- SLAAC, static IP address
- DNS, DHCPv6 server/client
- Static/Policy route
- IPSec (IKEv2 6in6, 4in6, 6in4)

### Connection

- Routing mode, bridge mode and hybrid mode
- Ethernet and PPPoE
- NAT and PAT
- NAT Virtual Server Load Balancing
- VLAN tagging (802.1Q)
- Virtual interface (alias interface)
- Policy-based routing (user-aware)
- Policy-based NAT (SNAT)
- GRE
- Dynamic routing (RIPv1/v2 and OSPF, BGP)
- DHCP client/server/relay
- Dynamic DNS support
- WAN trunk for more than 2 ports
- Per host session limit
- Guaranteed bandwidth
- Maximum bandwidth
- Priority-bandwidth utilization
- Bandwidth limit per user
- Bandwidth limit per IP
- Bandwidth management by application
- Link Aggregation support\*<sup>1</sup>

## Management

### Authentication

- Local user database
- External user database: Microsoft Windows Active Directory, RADIUS, LDAP
- IEEE 802.1x authentication
- Captive portal Web authentication
- XAUTH, IKEv2 with EAP VPN authentication
- IP-MAC address binding

- SSO (Single Sign-On) support
- Supports 2-factor authentication with Google Authenticator as the second factor for administrator account

#### System Management

- Role-based administration
- Multi-lingual Web GUI (HTTPS and HTTP)
- Command line interface (console, web console, SSH and telnet)

- SNMP v1, v2c, v3
- System configuration rollback
- Configuration auto backup
- Firmware upgrade via FTP, FTP-TLS and Web GUI
- New firmware notify and auto upgrade
- Dual firmware images
- Cloud CNM SecuManager

#### Logging and Monitoring

- Comprehensive local logging
- Syslog (to up to 4 servers)
- Email alerts (to up to 2 servers)
- Real-time traffic monitoring
- Built-in daily report
- Cloud CNM SecuReporter

\*: For specific models supporting the 3G and 4G dongles on the list, please refer to the Zyxel product page at 3G dongle document  
\*1: Supported models ATP500/700/800

## Access Point Compatibility List

### Secure Tunnel

Product	Remote AP	Number of Tunnel Mode AP	Supported Remote AP
<b>ATP</b>	ATP100(W)	6	<ul style="list-style-type: none"> <li>• WAX650S</li> <li>• WAX610D</li> <li>• WAX510D</li> <li>• WAC500</li> <li>• WAC500H</li> </ul>
	ATP200	10	
	ATP500	18	
	ATP700	66	
	ATP800	130	
<b>USG FLEX</b>	USG FLEX 100(W)	6	
	USG FLEX 200	10	
	USG FLEX 500	18	
	USG FLEX 700	66	
<b>VPN</b>	VPN50	10	
	VPN100	18	
	VPN300	66	
	VPN1000	258	

### Managed AP Service

Product	Unified AP	Unified Pro AP	
<b>Models</b>	<ul style="list-style-type: none"> <li>• NWA5301-NJ</li> <li>• NWA5121-NI</li> <li>• NWA5123-AC HD</li> <li>• NWA5123-AC</li> <li>• NWA5123-NI</li> </ul>	<ul style="list-style-type: none"> <li>• WAC5302D-S</li> <li>• WAX510D</li> <li>• WAC5302D-Sv2*</li> <li>• WAC500*</li> <li>• WAC500H*</li> </ul>	<ul style="list-style-type: none"> <li>• WAC6103D-I</li> <li>• WAC6503D-S</li> <li>• WAC6502D-S</li> <li>• WAC6303D-S</li> <li>• WAC6553D-E</li> </ul>
<b>Functions</b>			
<b>Central management</b>	Yes	Yes	
<b>Auto provisioning</b>	Yes	Yes	
<b>Data forwarding</b>	Local bridge	Local bridge/Data tunnel	
<b>ZyMesh</b>	Yes	Yes	

\*: From APC3.0, commercial gateways supporting APC technology are able to recognize APs with FW release higher than APC3.0 as Forward Compatible APs. Resellers can introduce newly-available Zyxel APs with basic features supported without upgrading any new controller firmware.

## Accessories

### Transceivers (Optional)

Model	Speed	Connector	Wavelength	Max. Distance	Optical Fiber Type	DDMI
<b>SFP10G-SR*</b>	10-Gigabit SFP+	Duplex LC	850 nm	300 m/ 328 yd	Multi Mode	Yes
<b>SFP10G-SR-E*</b>	10-Gigabit SFP+	LC	850 nm	300 m/ 328 yd	Multi Mode	Yes
<b>SFP10G-LR*</b>	10-Gigabit SFP+	Duplex LC	1310 nm	10 km/ 10936 yd	Single Mode	Yes
<b>SFP10G-LR-E*</b>	10-Gigabit SFP+	LC	1310 nm	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-1000T</b>	Gigabit	RJ-45	-	100 m/ 109 yd	Multi Mode	-
<b>SFP-SX-D</b>	Gigabit	LC	850 nm	550 m/ 601 yd	Multi Mode	Yes
<b>SFP-SX-E</b>	Gigabit	LC	850 nm	550 m/ 601 yd	Multi Mode	Yes
<b>SFP-LX-10-D</b>	Gigabit	LC	1310 nm	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-LX-10-E</b>	Gigabit	LC	1310 nm	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-LHX1310-40-D</b>	Gigabit	LC	1310 nm	40 km/ 43744 yd	Single Mode	Yes
<b>SFP-ZX-80-D</b>	Gigabit	LC	1550 nm	80 km/ 87488 yd	Single Mode	Yes
<b>SFP-BX1310-10-D*1</b>	Gigabit	LC	1310 nm(TX) 1490 nm(RX)	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-BX1310-E*1</b>	Gigabit	LC	1310 nm (TX) 1550 nm (RX)	20 km/ 21872 yd	Single Mode	Yes
<b>SFP-BX1490-10-D*1</b>	Gigabit	LC	1490 nm(TX) 1310 nm(RX)	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-BX1550-E*1</b>	Gigabit	LC/SC	1550 nm (TX) 1310 nm (RX)	20 km/ 21872 yd	Single Mode	Yes

\*:only USG2200-VPN supports 10-Gigabit SFP+

\*1: SFP-BX1310-10-D & SFP-BX1490-10-D, SFP-BX1310-E & SFP-BX1550-E must be used in pairs.

**For more product information, visit us on the web at [www.zyxel.com](http://www.zyxel.com)**

Copyright © 2021 Zyxel and/or its affiliates. All rights reserved.  
All specifications are subject to change without notice.

Datasheet **ZyWALL ATP100/100W/200/500/700/800**



05/05/21