



# ZyWALL USG FLEX 100/100W/200/500/700


## USG FLEX Firewall


The latest USG FLEX 100 provides one single management platform on the cloud while expanding and strengthening the protection from firewalls to access points with automatic responses. The newly designed USG FLEX Series is capable of minimizing computing power usage and maximizing firewall performance, delivering up to 5x UTM performance with cloud flexibility and collaborative protection to help connect and secure small or mid-sized business users.

### Benefits

#### Nebula Together


We bring USG FLEX to join the Nebula Cloud Management family with the new ZLD5.0 update. Simply deploying a firewall will not guarantee safety while untrusted devices, users, and applications are accessed widely. Nebula's revolutionary solution brings a Zero-Trust Network Security granular policy to organizations with access authentications and secured WiFi.

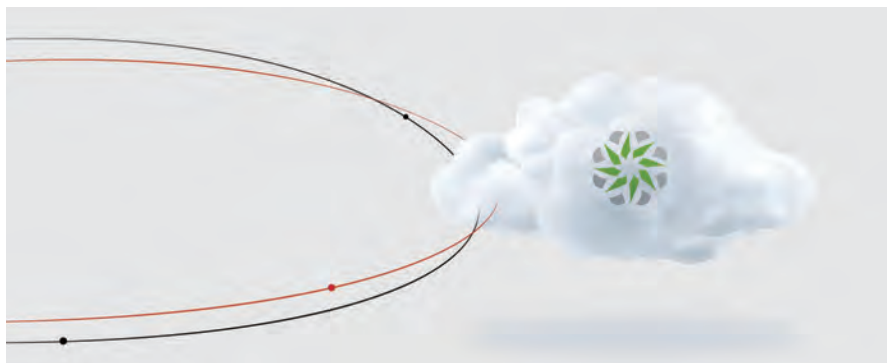

-  Flexibility to adapt to on-premises or Nebula cloud management
-  Precise detection with cloud query express mode
-  High assurance multi-layered protection
-  DNS and URL content filter ensures the web security
-  Automatically contains threats at the network edge
-  Secure WiFi guarantees remote work security
-  Add two-factor authentication for an extra layer of protection


## Higher precision detection uncovers threats

Zyxel Security Cloud keeps learning from collecting threat information. USG FLEX series supports advanced Anti-Malware with cloud query express mode which expands billions of signatures. The cloud query with high detection rate helps verify the file hash within seconds.

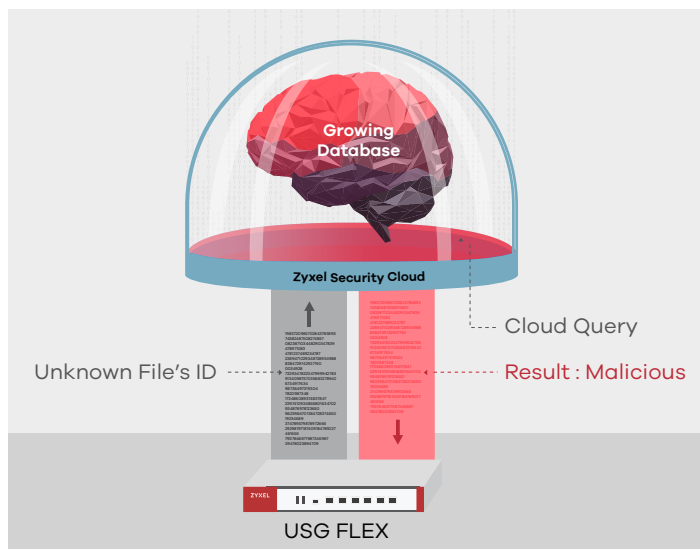


## Best threat intelligence alliance

To ensure your network on getting the best protection, USG FLEX integrates threat intelligence from leading companies and organizations in the cybersecurity field for scaled information about file and real-time threat data. By leveraging a wider malware coverage with multiple-sourced database, this increases the accuracy in threat detection. Web Filtering is also included to safeguard all internet access, especially with CTIRU (Counter-Terrorism Internet Referral Unit) to restrict access to terrorist materials online.

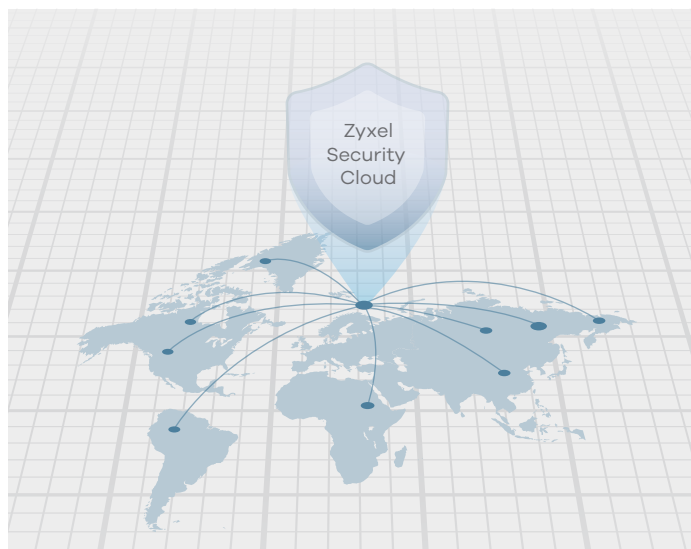

## High assurance multi-layered protection

USG FLEX is designed with multi-layer protection against multiple types of threats from in and out. Multiple security services empower you to restrict users' inappropriate application usage or web access. Zyxel offers leading-industry DNS content filter, eliminating blind spots in all encrypted traffic with TLS 1.3 without the need to deploy SSL inspection. All together safeguarding your network without any unattended gaps.

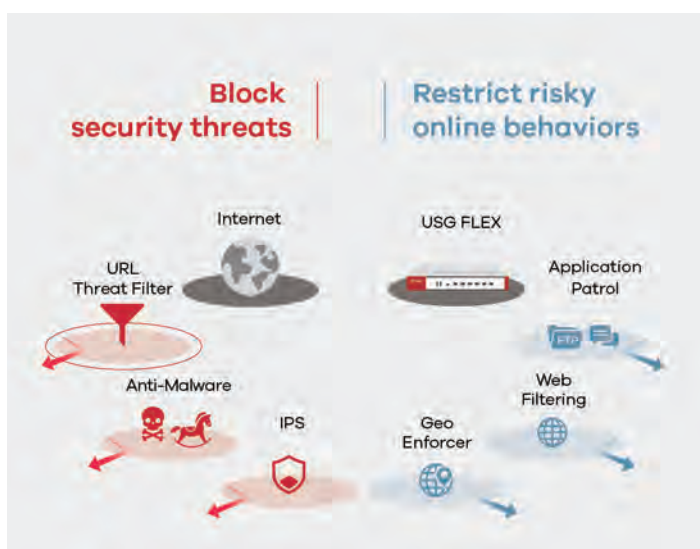


## Simplified and Unified Licensing Experience

We know the experience from license purchase and renewals are equally important to our partners. We've optimized the licensing management platform and brought a consistent migration path between on-premise and our cloud platform. We make sure our partners can quickly adapt to a secure environment without the hassle but retaining the flexibility for those who need to practice the same security across networks scenarios.




## Performance boost

The newly designed platform gains up to 125% firewall performance. Maximizes UTM performance by minimizing computing power usage and get additional 500% UTM performance with cloud query express mode.

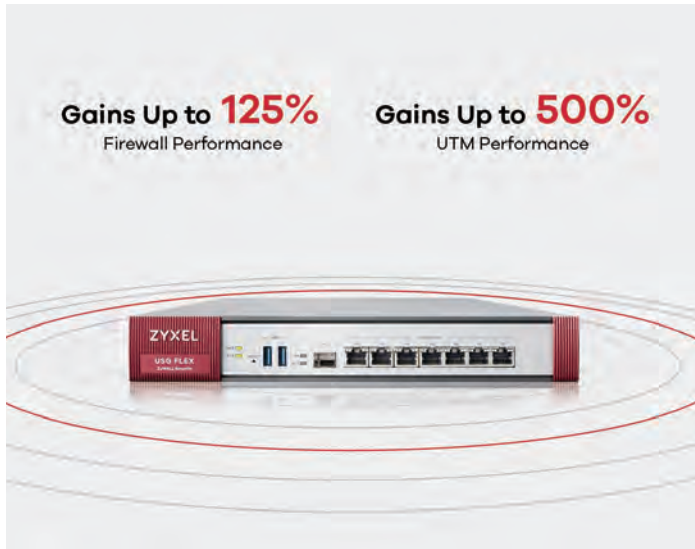


## Stay ahead of threats with CDR

Collaborative Detection & Response (CDR) is used to identify threats and risks posed in the more complex organization workforce, workload, and workplace. USG FLEX firewalls to Nebula provides network admins with a rule-based security policy. The firewalls detect a threat on any of the connected clients and will sync with the Nebula control center, then automatically respond to cyber threats and contain the device(s) at the edge (Wireless Access Point) of your network. It is a perfect fit for IT to address the requirements of a decentralized network infrastructure and provide automatic protection.

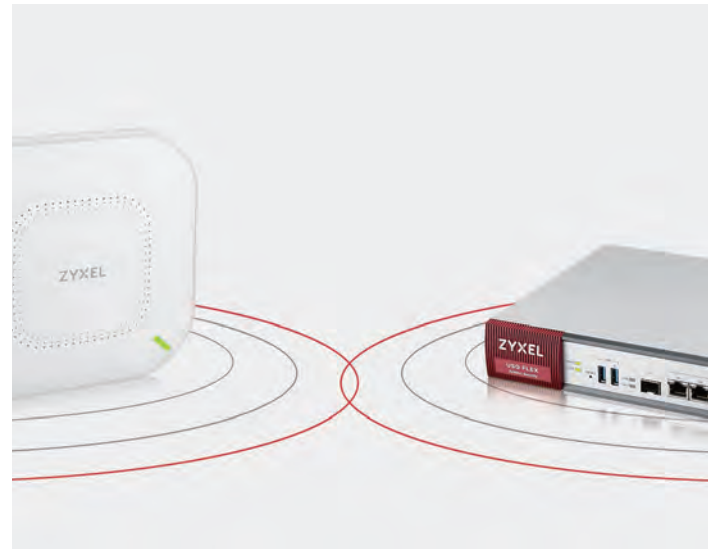


## Same Security Across Networks

ZyXel's new Secure WiFi feature gives you the ability to create a "drop-in" Access Point that can be configured to replicate the SSID of your office and automatically create a secure tunnel, creating seamless accessibility to your corporate network. This simplifies the deployment by creating a plug-n-play option while maintaining a high level of control over the security of remote workplaces.

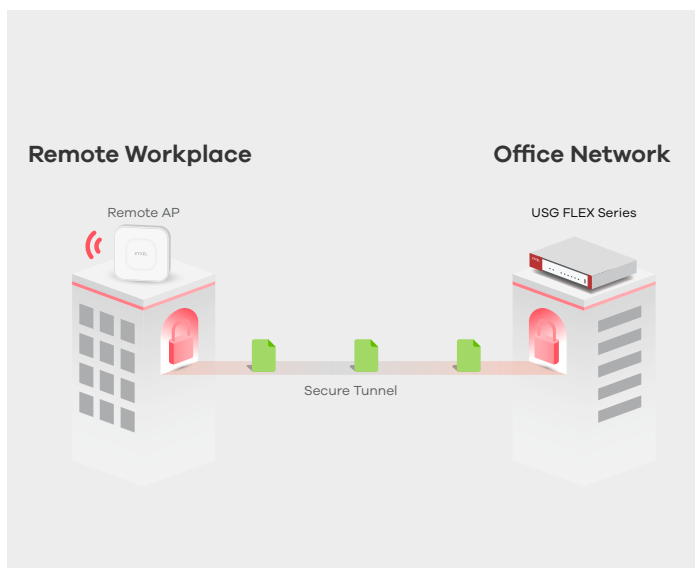

## Level Up Security with 2FA Network Access

Password is not enough to secure your network access. You need a second form of authentication to ensure unauthorized users can't access your company's databases, email accounts and more. ZyXel Two-Factor Authentication allows your organizations to authenticate the identities of users accessing your networks through remote desktops and personal mobile devices.

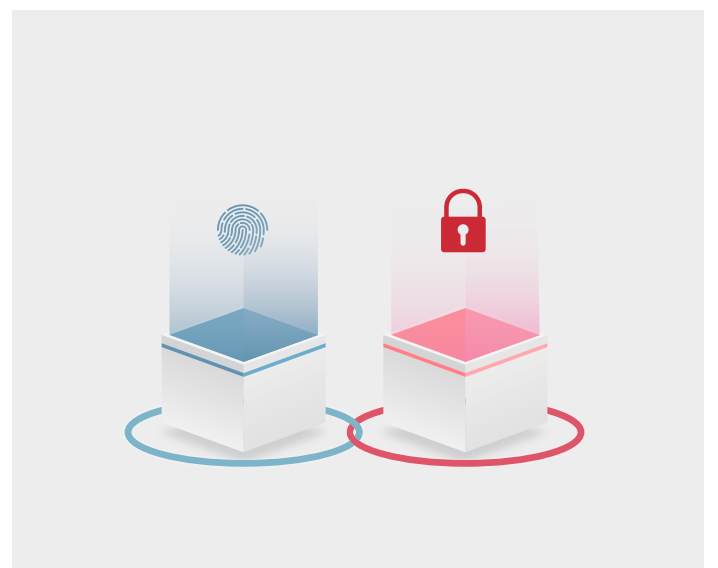


## Comprehensive Web Filtering Service

USG FLEX Firewall delivers enhanced web filtering functionality and security through its powerful combination of both reputation and category-based filtering. The dynamic content categorization analyzes the content of a previously unknown website and domain and determines if it belongs to an undesirable category including gambling, pornography, games, and many others. A newly added DNS content filter offers a better approach to inspect web access, particularly when the website is deploying ESNI (Encrypted Server Name Indication) where the traditional URL filtering failed to identify the destination domain.




## Analytics report and enhanced insights

USG FLEX series dashboard gives user-friendly traffic summary and threat statistic visuals. Utilize SecuReporter for further threat analysis with correlation feature design, making it easy to proactively trackback network status to prevent the next threat event. Centralized visibility of network activities for you to easily manage multiple clients.

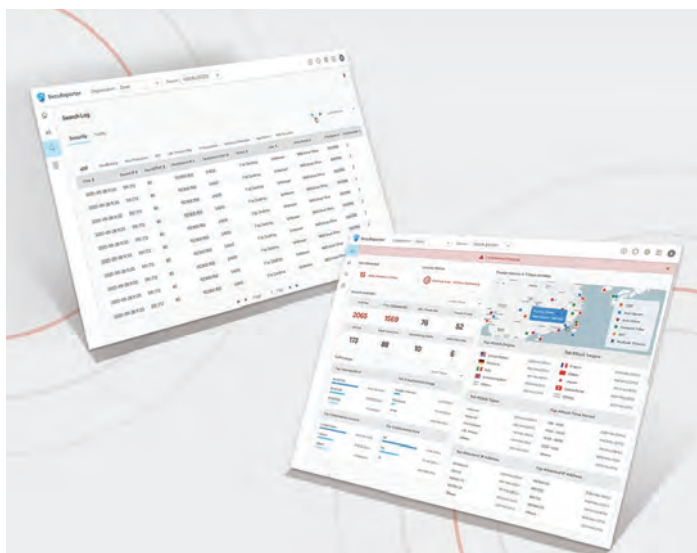

## Comprehensive connectivity

ZyWALL USG FLEX series not only protects your network, but it also support Hospitality features including Hotspot and concurrent device upgrade. You can buy time-based bundle, so only pay what you need.

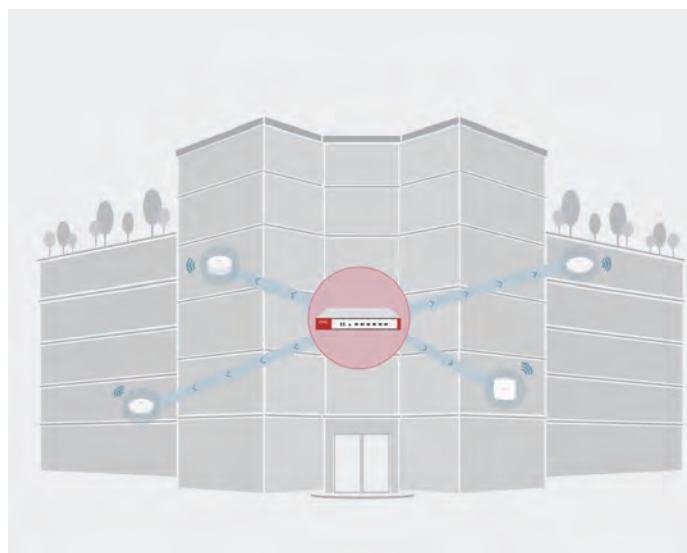

## Hardware Included License

● Nebula Feature Included ● On Premises Feature Included

		First Purchase*		Renewal Option	
	Service/Component	On Premises	Nebula Cloud	Pack License	Single License
<b>UTM</b>	Web Filtering	●	●	● ●	●
	Anti-Malware	●	●	● ●	●
	IPS	●	●	● ●	-
	Application Patrol	●	●	● ●	-
	SecuReporter	●	●	● ●	-
	Collaborative Detection & Response	●	●	● ●	● ● SecuReporter Premium
	Email Security	●	-	● ●	-
	Security Profile Sync	-	●	● ●	-
<b>Hospitality</b>	Hotspot Management service*1	●	-	●	-
	Concurrent Device Upgrade*2	●	-	●	-
<b>Nebula</b>	Nebula Professional Pack	-	Purchased UTM Pack*3	●	-
	Nebula Plus Pack	-	-	●	-
<b>Secure WiFi</b>	Secure tunnel & Managed AP Service	-	-	-	● ●

\* : UTM Pack Included: 30 Days Trial+1Year / Device Only: 30 Days Trial




\*1: Hotspot Management is available on USG FLEX 200/500/700 only

\*2: Allowing additional connected clients is available to USG FLEX 500/700 only



\*3: Nebula Professional Pack will only be offered to users who have purchased UTM Pack

License Service	Feature
<b>UTM License</b>	
Web Filtering	Block access to malicious or risky web sites
IPS	Deep-packet inspection against known attacks from Network
Application Patrol	Automatically categorize and manage the network application usage
Anti-Malware	Scan files at the gateway or Zyxel security cloud for malware and other threats
Collaborative Detection & Response	Automatically contain threats at the network edge
Email Security	Fast detection to block spam/phishing mail with malicious contents
SecuReporter	Cloud-based intelligent analytics and report
Security Profile Sync	An easy-to-use tool to help business sync up security profiles across multiple networks
<b>Hospitality License</b>	
Hotspot Management	Various Network Access Control
Concurrent device	Top up allowed number of connected clients

# Specifications

Model	USG FLEX 100	USG FLEX 100W	USG FLEX 200
Product photo			
<b>Hardware Specifications</b>			
WiFi Standard	-	802.11 a/b/g/n/ac	-
10/100/1000 Mbps RJ-45 ports	4 x LAN/DMZ, 1 x WAN, 1 x SFP	4 x LAN/DMZ, 1 x WAN, 1 x SFP	4 x LAN/DMZ, 2 x WAN, 1 x SFP
USB3.0 ports	1	1	2
Console port	Yes (RJ-45)	Yes (RJ-45)	Yes (DB9)
Rack-mountable	-	-	Yes
Fanless	Yes	Yes	Yes
<b>System Capacity &amp; Performance*1</b>			
SPI firewall throughput (Mbps)*2	900	900	1,800
VPN throughput (Mbps)*3	270	270	450
VPN IMIX throughput (Mbps)*3	100	100	160
IDP throughput (Mbps)*4	540	540	1,100
AV throughput (Mbps)*4	360	360	570
UTM throughput (AV and IDP)*4	360	360	550
Max. TCP concurrent sessions*5	300,000	300,000	600,000
Max. concurrent IPsec VPN tunnels*6	40	40	100
Concurrent SSL VPN users	30	30	60
VLAN interface	8	8	16
Concurrent devices logins (default/max.)*7*8	64	64	200
<b>Speedtest Performance</b>			
SPI firewall throughput (Mbps)*11	760	760	810
<b>Security Features</b>			
Anti-Malware*7	Yes	Yes	Yes
IPS*7	Yes	Yes	Yes
Application Patrol*7	Yes	Yes	Yes
Email Security	Yes	Yes	Yes
Web filtering*7	Yes	Yes	Yes
SecuReporter Premium*7	Yes	Yes	Yes
Collaborative Detection & Response*7	Yes	Yes	Yes
SSL (HTTPS) Inspection	Yes	Yes	Yes
2-Factor Authentication	Yes	Yes	Yes
<b>VPN Features</b>			
VPN	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec
Microsoft Azure	Yes	Yes	Yes
Amazon VPC	Yes	Yes	Yes
<b>WLAN Management</b>			
Default Number of Managed AP	8	8	8
Recommend max. AP in 1 AP Group	10	10	20
Secure WiFi Service*7	Yes	Yes	Yes
Maximum No. of Tunnel-Mode AP	6	6	10
Maximum No. of Managed AP	24	24	40

Model	USG FLEX 100	USG FLEX 100W	USG FLEX 200	
<b>Connectivity Management</b>				
Cloud-managed (Nebula) Mode	Yes	Yes	Yes	
Hotspot Management*7	-	-	Yes	
Ticket printer support*9/ Support Qty (max.)	-	-	Yes (SP350E) / 10	
Device HA Pro	-	-	-	
<b>Power Requirements</b>				
Power input	12V DC, 2A max.	12V DC, 2A max.	12V DC, 2.5A max.	
Max. power consumption (Watt Max.)	12.5	12.5	13.3	
Heat dissipation (BTU/hr)	42.65	42.65	45.38	
<b>Physical Specifications</b>				
Item	Dimensions (WxDxH) (mm/in.)	216 x 147.3 x 33/ 8.50 x 5.80 x 1.30	216 x 147.3 x 33/ 8.50 x 5.80 x 1.30	272 x 187 x 36/ 10.7 x 7.36 x 1.42
	Weight (Kg/lb.)	0.85/1.87	0.85/1.87	1.4/3.09
Packing	Dimensions (WxDxH) (mm/in.)	284 x 190 x 100/ 11.18 x 7.48 x 3.94	284 x 190 x 100/ 11.18 x 7.48 x 3.94	427 x 247 x 73/ 16.81 x 9.72 x 2.87
	Weight (kg/lb.)	1.40/3.09	1.40/3.09	2.23 (W/O bracket) 2.42 (W/ bracket)
Included accessories	<ul style="list-style-type: none"> <li>Power adapter</li> <li>RJ-45 - RS-232 cable for console connection</li> </ul>	<ul style="list-style-type: none"> <li>Power adapter</li> <li>RJ-45 - RS-232 cable for console connection</li> </ul>	<ul style="list-style-type: none"> <li>Power adapter</li> <li>Rack mounting kit</li> </ul>	
<b>Environmental Specifications</b>				
Operating	Temperature	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
Storage	Temperature	-30°C to 70°C/ -22°F to 158°F	-30°C to 70°C/ -22°F to 158°F	-30°C to 70°C/ -22°F to 158°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
MTBF (hr)	989810.8	989810.8	529688.2	
<b>Certifications</b>				
EMC	FCC Part 15 (Class B), CE EMC (Class B),BSMI	FCC Part 15 (Class B), CE EMC (Class B),BSMI	FCC Part 15 (Class B), CE EMC (Class B), C-Tick (Class B), BSMI	
Safety	LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI	

Model	USG FLEX 500	USG FLEX 700
Product photo		
<b>Hardware Specifications</b>		
10/100/1000 Mbps RJ-45 ports	7 (configurable), 1 x SFP (configurable)	12 (configurable), 2 x SFP (configurable)
USB3.0 ports	2	2
Console port	Yes (DB9)	Yes (DB9)
Rack-mountable	Yes	Yes
Fanless	-	-
<b>System Capacity &amp; Performance*1</b>		
SPI firewall throughput (Mbps)*2	2,300	5,400
VPN throughput (Mbps)*3	810	1,100
VPN IMIX throughput (Mbps)*3	240	550
IDP throughput (Mbps)*4	1,500	2,000
AV throughput (Mbps)*4	800	1,450
UTM throughput (AV and IDP)*4	800	1,350
Max. TCP concurrent sessions*5	1,000,000	1,600,000
Max. concurrent IPsec VPN tunnels*6	300	500
Concurrent SSL VPN users	150	150
VLAN interface	64	128
Concurrent devices logins (default/max.)*7*8	200/300	500/800
<b>Speedtest Performance</b>		
SPI firewall throughput (Mbps)*11	810	840
<b>Security Features</b>		
Anti-Malware*7	Yes	Yes
IPS*7	Yes	Yes
Application Patrol*7	Yes	Yes
Email Security	Yes	Yes
Web filtering*7	Yes	Yes
SecuReporter Premium*7	Yes	Yes
Collaborative Detection & Response*7	Yes	Yes
SSL (HTTPS) Inspection	Yes	Yes
2-Factor Authentication	Yes	Yes
<b>VPN Features</b>		
VPN	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec
Microsoft Azure	Yes	Yes
Amazon VPC	Yes	Yes
<b>WLAN Management</b>		
Default Number of Managed AP	8	8
Recommend max. AP in 1 AP Group	60	200
Secure WiFi Service*7	Yes	Yes
Maximum No. of Tunnel-Mode AP	18	66
Maximum No. of Managed AP	72	264



Model	USG FLEX 500	USG FLEX 700	
<b>Connectivity Management</b>			
Cloud-managed (Nebula) Mode	Yes	Yes	
Hotspot Management*7	Yes	Yes	
Ticket printer support*9/ Support Qty (max.)	Yes (SP350E) / 10	Yes (SP350E) / 10	
Device HA Pro	Yes	Yes	
<b>Power Requirements</b>			
Power input	12V DC, 4.17A	100-240V AC, 50/60Hz, 2.5A max.	
Max. power consumption (Watt Max.)	24.1	46	
Heat dissipation (BTU/hr)	82.23	120.1	
<b>Physical Specifications</b>			
Item	Dimensions (WxDxH) (mm/in.)	300 x188 x 44/ 16.93 x 7.4 x 1.73	430 x 250 x 44/ 16.93 x 9.84 x 1.73
	Weight (Kg/lb.)	1.65/3.64	3.3/7.28
Packing	Dimensions (WxDxH) (mm/in.)	351 x 152 x 245/ 13.82 x 5.98 x 9.65	519 x 392 x 163/ 20.43 x 15.43 x 6.42
	Weight (kg/lb.)	2.83/6.24	4.8/10.58
Included accessories	<ul style="list-style-type: none"> <li>• Power adapter</li> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul>	<ul style="list-style-type: none"> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul>	
<b>Environmental Specifications</b>			
Operating	Temperature	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)
Storage	Temperature	-30°C to 70°C/ -22°F to 158°F	- 30°C to 70°C/ - 22°F to 158°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)
MTBF (hr)	529688.2	947736	
Acoustic Noise	24.5dBA on < 25degC Operating Temperature, 41.5dBA on full FAN speed	24.5dBA on < 25degC Operating Temperature, 41.5dBA on full FAN speed	
<b>Certifications</b>			
EMC	FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI	FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI	
Safety	LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI	

\*: This matrix with firmware ZLD4.50 or later.

\*1: Actual performance may vary depending on system configuration, network conditions, and activated applications.

\*2: Maximum throughput based on RFC 2544 (1,518-byte UDP packets).

\*3: VPN throughput measurement are based on RFC 2544 (1,424-byte UDP packets); IMIX: UDP throughput based on a combination of 64 byte, 512 byte, and 1424 byte packet sizes.

\*4: AV (with Express Mode) and IDP throughput measured using the industry standard HTTP performance test (1,460-byte HTTP packets). Testing done with multiple flows.

\*5: Maximum sessions measured using the industry standard IXIA IxLoad testing tool

\*6: Including Gateway-to-Gateway and Client-to-Gateway.

\*7: With Zyxel service license to enable or extend the feature capacity.

\*8: This is the recommend maximum number of concurrent logged-in devices.

\*9: SafeSearch function in CF need to enable SSL inspection firstly and not for small business models.

\*10: With Hotspot Management license support

\*11: The Speedtest result is conducted with 1Gbps WAN link in real world and it is subject to fluctuate due to quality of the ISP link.

## Wireless Specifications

Model		USG FLEX 100W	
Standard compliance		802.11 a/b/g/n/ac	
Wireless frequency		2.4 / 5 GHz	
Radio		2	
SSID number		8	
Maximum transmit power (Max. total channel)	US (FCC) 2.4 GHz	25 dBm, 3 antennas	
	US (FCC) 5 GHz	25 dBm, 3 antennas	
	EU (ETSI) 2.4 GHz	20 dBm(EIRP), 3 antennas	
	EU (ETSI) 5 GHz	20 dBm(EIRP), 3 antennas	
No. of antenna		3 detachable antennas	
Antenna gain		2 dBi @ 2.4GHz 3 dBi @ 5 GHz	
Data rate		<ul style="list-style-type: none"> <li>• 802.11n: up to 450Mbps</li> <li>• 802.11ac: up to 1300Mbps</li> </ul>	
Frequency Band	2.4 GHz (IEEE 802.11 b/g/n)	<ul style="list-style-type: none"> <li>• USA (FCC): 2.412 to 2.462 GHz</li> <li>• Europe (ETSI): 2.412 to 2.472 GHz</li> <li>• TWN (NCC): 2.412 to 2.462 GHz</li> </ul>	
	5 GHz (IEEE 802.11 a/n/ac)	<ul style="list-style-type: none"> <li>• USA (FCC): 5.150 to 5.250 GHz; 5.250 to 5.350 GHz; 5.470to 5.725 GHz; 5.725 to 5.850 GHz</li> <li>• Europe (ETSI): 5.15 to 5.35 GHz; 5.470 to 5.725 GHz</li> <li>• TWN (NCC): 5.15 to 5.25 GHz; 5.25 to 5.35 GHz; 5.470 to 5.725 GHz; 5.725 to 5.850 GHz</li> </ul>	
Receive sensitivity	2.4 GHz	11 Mbps ≤ -87 dBm 54 Mbps ≤ -74 dBm	HT20 ≤ -71 dBm HT40 ≤ -68 dBm
	5 GHz	54 Mbps ≤ -74 dBm HT40, MCS23 ≤ -68 dBm VHT40, MCS9 ≤ -62 dBm	HT20, MCS23 ≤ -71 dBm VHT20, MCS8 ≤ -66 dBm VHT80, MCS9 ≤ -59 dBm

## Software Features

### Security Service

#### Firewall

- ICSA-certified corporate firewall
- Routing and transparent (bridge) modes
- Stateful packet inspection
- User-aware policy enforcement
- SIP/H.323 NAT traversal
- ALG support for customized ports
- Protocol anomaly detection and protection
- Traffic anomaly detection and protection
- Flooding detection and protection
- DoS/DDoS protection

#### Unified Security Policy

- Unified policy management interface
- Support Content Filtering, Application Patrol, firewall (ACL/SSL)
- Policy criteria: zone, source and destination IP address, user, time

#### Intrusion Detection and Prevention (IDP)

- Routing and transparent (bridge) mode
- Signature-based and behavior based scanning
- Customized signatures supported
- Automatic signature updates

#### Application Patrol

- Granular control over the most important applications
- Identifies and controls application behavior
- Supports 30+ application categories
- Supports user authentication
- Real-time statistics and reports

#### Anti-Malware

- Stream-based scan engine (Stream Mode)
- HTTP, FTP, SMTP, and POP3 protocol supported
- No file size limitation
- Automatic signature updates

#### E-mail Security

- Transparent mail interception via SMTP and POP3 protocols
- Spam and Phishing mail detection
- Blacklist and whitelist support
- Supports DNSBL checking

#### URL Threat Filter

- Botnet C&C websites blocking
- Malicious URL blocking
- Supports External URL blacklist

#### Content Filtering

- HTTPs domain filtering
- SafeSearch support
- Whitelist websites enforcement
- URL blacklist and whitelist with keyword blocking
- Customizable warning messages and redirect URL
- Customizable Content Filtering block page
- URL categories increased to 111
- CTIRU (Counter-Terrorism Internet Referral Unit) support

## IP Exception

- Provides granular control for target source and destination IP
- Supports security service scan bypass for IDP, Anti-Malware and URL Threat Filter

## VPN

### IPSec VPN

- Key management: IKEv1 (x-auth, mode-config), IKEv2 (EAP, configuration payload)
- Encryption: DES, 3DES, AES (256-bit)
- Authentication: MD5, SHA1, SHA2 (512-bit)
- Perfect forward secrecy (DH groups) support 1, 2, 5, 14, 15-18, 20-21
- PSK and PKI (X.509) certificate support
- IPSec NAT traversal (NAT-T)
- Dead Peer Detection (DPD) and relay detection
- VPN concentrator
- Route-based VPN Tunnel Interface (VTI)
- VPN high availability (Failover, LB)
- GRE over IPSec
- NAT over IPSec
- L2TP over IPSec
- Zyxel VPN client provisioning
- Support iOS L2TP/IKE/IKEv2 VPN client provision

### SSL VPN

- Supports Windows and Mac OS X
- Supports full tunnel mode
- Supports 2-Factor authentication

## Networking

### WLAN Management

- Supports AP Controller (APC) version 3.60
- 802.11ax Wi-Fi 6 AP and WPA3 support
- 802.11k/v/r support
- Wireless L2 isolation
- Supports auto AP FW update
- Scheduled WiFi service
- Dynamic Channel Selection (DCS)
- Client steering for 5 GHz priority and sticky client prevention
- Auto healing
- Customizable captive portal page
- WiFi Multimedia (WMM) wireless QoS
- CAPWAP discovery protocol
- Multiple SSID with VLAN
- Supports ZyMesh
- Support AP forward compatibility
- Rogue AP Detection

## Mobile Broadband

- WAN connection failover via 3G and 4G\* USB modems
- Auto fallback when primary WAN recovers

### IPv6 Support

- Dual stack
- IPv4 tunneling (6rd and 6to4 transition tunnel)
- SLAAC, static IP address
- DNS, DHCPv6 server/client
- Static/Policy route
- IPSec (IKEv2 6in6, 4in6, 6in4)

### Connection

- Routing mode, bridge mode and hybrid mode
- Ethernet and PPPoE
- NAT and PAT
- NAT Virtual Server Load Balancing
- VLAN tagging (802.1Q)
- Virtual interface (alias interface)
- Policy-based routing (user-aware)
- Policy-based NAT (SNAT)
- GRE
- Dynamic routing (RIPv1/v2 and OSPF, BGP)
- DHCP client/server/relay
- Dynamic DNS support
- WAN trunk for more than 2 ports
- Per host session limit
- Guaranteed bandwidth
- Maximum bandwidth
- Priority-bandwidth utilization
- Bandwidth limit per user
- Bandwidth limit per IP
- Bandwidth management by application
- Link Aggregation support\*<sup>1</sup>

## Management

### Nebula Cloud Management

- Unlimited Registration & Central Management (Configuration, Monitoring, Dashboard, Location Map & Floor Plan Visual) of Nebula Devices
- Network Function Scheduling (SSID/PoE/Firewall Rules)
- MAC-Based and 802.1X Authentication
- Captive Portal Authentication

### Authentication

- Local user database
- External user database: Microsoft Windows Active Directory, RADIUS, LDAP
- IEEE 802.1x authentication
- Captive portal Web authentication

- XAUTH, IKEv2 with EAP VPN authentication
- IP-MAC address binding
- SSO (Single Sign-On) support
- Supports 2-factor authentication with Google Authenticator as the second factor for administrator account

### System Management

- Role-based administration
- Multi-lingual Web GUI (HTTPS and HTTP)
- Command line interface (console, web console, SSH and telnet)
- SNMP v1, v2c, v3
- System configuration rollback
- Configuration auto backup
- Firmware upgrade via FTP, FTP-TLS and Web GUI
- New firmware notify and auto upgrade
- Dual firmware images
- Cloud CNM SecuManager

### Logging and Monitoring

- Comprehensive local logging
- Syslog (to up to 4 servers)
- Email alerts (to up to 2 servers)
- Real-time traffic monitoring
- Built-in daily report
- Cloud CNM SecuReporter

\*: For specific models supporting the 3G and 4G dongles on the list, please refer to the Zyxel product page at 3G dongle document

\*1: Supported models USG FLEX 500/700

## Access Point Compatibility List

### Secure Tunnel for Remote AP


Functions	Remote AP	Number of Tunnel Mode AP	Supported Remote AP
<b>ATP</b>	ATP100(W)	6	<ul style="list-style-type: none"> <li>• WAX650S</li> <li>• WAX610D</li> <li>• WAX510D</li> <li>• WAC500</li> <li>• WAC500H</li> </ul>
	ATP200	10	
	ATP500	18	
	ATP700	66	
	ATP800	130	
<b>USG FLEX</b>	USG FLEX100(W)	6	
	USG FLEX200	10	
	USG FLEX500	18	
	USG FLEX700	66	
<b>VPN</b>	VPN50	10	
	VPN100	18	
	VPN300	66	
	VPN1000	258	

### Managed AP Service

Product	Unified AP	Unified Pro AP	
<b>Models</b>	<ul style="list-style-type: none"> <li>• NWA5301-NJ</li> <li>• NWA5121-NI</li> <li>• NWA5123-AC HD</li> <li>• NWA5123-AC</li> <li>• NWA5123-NI</li> </ul>	<ul style="list-style-type: none"> <li>• WAC5302D-S</li> <li>• WAX510D</li> <li>• WAC5302D-Sv2*</li> <li>• WAC500*</li> <li>• WAC500H*</li> </ul>	<ul style="list-style-type: none"> <li>• WAC6103D-I</li> <li>• WAC6503D-S</li> <li>• WAC6502D-S</li> <li>• WAC6303D-S</li> <li>• WAC6553D-E</li> </ul>
<b>Functions</b>			
<b>Central management</b>	Yes	Yes	
<b>Auto provisioning</b>	Yes	Yes	
<b>Data forwarding</b>	Local bridge	Local bridge/Data tunnel	
<b>ZyMesh</b>	Yes	Yes	

\*: From APC3.0, commercial gateways supporting APC technology are able to recognize APs with FW release higher than APC3.0 as Forward Compatible APs. Resellers can introduce newly-available Zyxel APs with basic features supported without upgrading any new controller firmware.

## Service Gateway Printer

Model	Feature	Supported Model
<b>SP350E</b> 	<ul style="list-style-type: none"> <li>Buttons: 3</li> <li>Paper roll width: 58 (+0/-1) mm</li> <li>Interface: 10/100 Mbps RJ-45 port</li> <li>Power input: 12V DC, 5A max.</li> <li>Item dimensions (WxDxH): 176 x 111 x 114 mm (6.93" x 4.37" x 4.49")</li> <li>Item weight: 0.8 kg (1.76 lb.)</li> </ul>	<ul style="list-style-type: none"> <li>USG FLEX 200</li> <li>USG FLEX 500</li> <li>USG FLEX 700</li> <li>VPN50</li> <li>VPN100</li> <li>VPN300</li> <li>VPN1000</li> <li>USG60(W)</li> <li>USG110</li> <li>USG210</li> <li>USG310</li> <li>USG1100</li> <li>USG1900</li> <li>USG2200 Series</li> <li>ZyWALL 110</li> <li>ZyWALL 310</li> <li>ZyWALL 1100</li> </ul>

\*: Hotspot management licenses required

## Transceivers (Optional)

Model	Speed	Connector	Wavelength	Max. Distance	Optical Fiber Type	DDMI
<b>SFP10G-SR*</b>	10-Gigabit SFP+	Duplex LC	850 nm	300 m/ 328 yd	Multi Mode	Yes
<b>SFP10G-LR*</b>	10-Gigabit SFP+	Duplex LC	1310 nm	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-1000T</b>	Gigabit	RJ-45	-	100 m/ 109 yd	Multi Mode	-
<b>SFP-LX-10-D</b>	Gigabit	LC	1310 nm	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-SX-D</b>	Gigabit	LC	850nm	550 m/ 601 yd	Multi Mode	Yes
<b>SFP-BX1310-10-D*1</b>	Gigabit	LC	1310 nm(TX) 1490 nm(RX)	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-BX1490-10-D*1</b>	Gigabit	LC	1490 nm(TX) 1310 nm(RX)	10 km/ 10936 yd	Single Mode	Yes

\*: only USG2200-VPN supports 10-Gigabit SFP+

\*1: SFP-BX1310-10-D and SFP-BX1490-10-D are must used in pairs.

For more product information, visit us on the web at [www.zyxel.com](http://www.zyxel.com)

Copyright © 2021 Zyxel and/or its affiliates. All rights reserved.  
All specifications are subject to change without notice.

